


Susp. Type:
4 Link

Anti-Squat 115.1%

Instnt Cntr Ht 14.4"

Instnt Cntr Length 68.6"

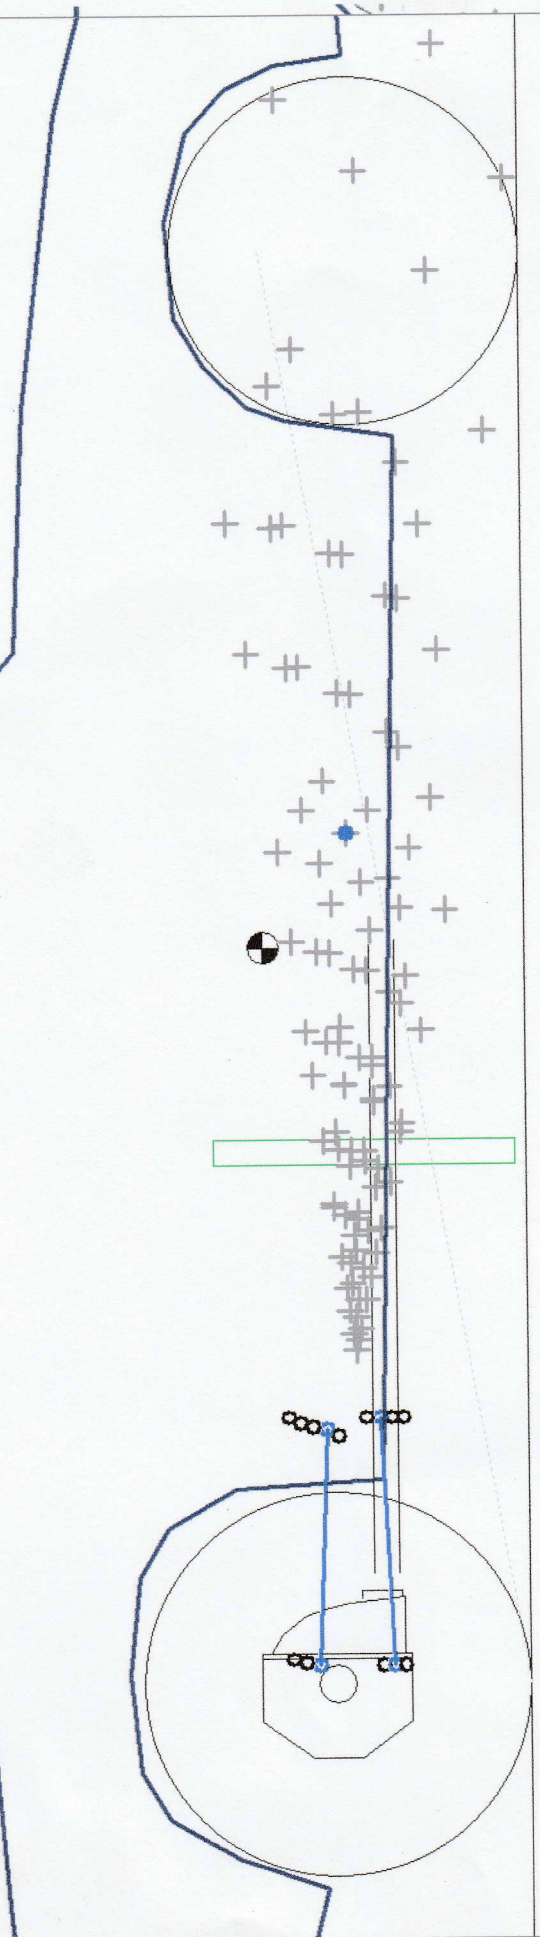

Pinion U-Joint Angle .00 Trans Yoke Movement .00 Driveshaft U-Joint Angle .00

Holes Used

Rear (axle)	Front (chassis)
Top Bracket #1 1.5" x 17"	#2 20.5" x 16.2"
Bottom Bracket #2 1.5" x 11"	#3 21.5" x 12"

Show Dynamic Changes
 Yes No

Rear Spring Compression, in: Front End Rise, in:

Click on Options, then Show 1 Inst Center (allow dynamics) to enable these features.

Tips: Click on 'Options', then 'Show 1 Instant Center' to allow 'Dynamic Changes' to watch 4-link and angles move. Click on an Instant Center 'cross hair' to display its link combination. Click on a bracket hole to move the linkage to that hole.

Trans Yoke Movement .00 Driveshaft U-Joint Angle .00

120 lb Rear Springs

3,138 lb with Driver

48.6%
on Rear wheels